


sappi | Fusion Topliner

One side full coated premium white topliner with impressive brightness and superior printability.

Features

- Silky top surface
- Unique top side coating, suitable for all printing processes
- Functional reverse side coating, optimized for all converting processes
- High brightness, smoothness and print gloss
- Superior lamination and mechanical properties

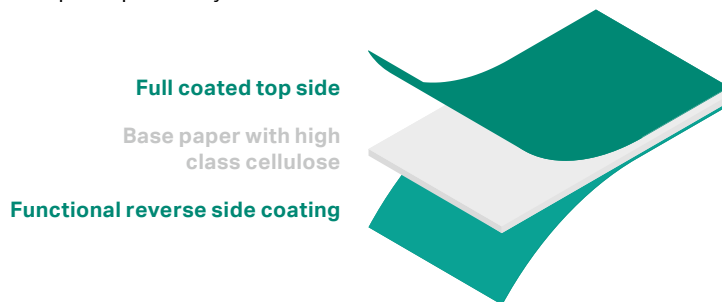

PROPERTY	UNITS	METHODS	TYPICAL VALUES						
BASIS WEIGHTS	g/m ²	ISO 536	90	100	115	135	160	180	200
THICKNESS	µm	ISO 534	88	100	115	135	162	182	202
SCT CD	kN/m	ISO 9895	1.6	2.0	2.4	2.6	3.3	3.6	4.0
SURFACE SMOOTHNESS TOP SIDE	µm	ISO 8791-4	1.6	1.6	1.6	1.6	1.8	1.8	2.0
BRIGHTNESS R457	%	ISO 2470	100	100	100	100	100	100	100
WHITENESS (CIE) TOP SIDE	%	ISO 11475	127	127	127	127	127	127	127
COBB (H ₂ O) 60S REVERSE SIDE	g/m ²	ISO 535	24	28	28	28	28	28	28
COBB (H ₂ O) TOP SIDE 1800 S	g/m ²	ISO 535	≤ 100	≤ 100	≤ 100	≤ 100	≤ 100	≤ 100	≤ 100
MOISTURE CONTENT ABS.	%	ISO 287	5.5	5.5	5.5	5.5	5.5	5.5	5.5

Printing processes

- Offset (pre- and postprint)
- Flexo (pre- and postprint)
- Digital inkjet (pre- and postprint)

Available in

- Sheets
- Reels

Conversion process

- Reel- and litho-lamination on open flute and solid board, creasing, diecutting, hot foil stamping, spot varnishing, embossing

Compliance

- Suitable for direct food contact
- Meets the purity requirements of toy safety (heavy metal content)
- Available on request as FSC™ (FSC™ C015022) or PEFC (PEFC/07-32-76) certified

End uses

- Packaging of consumer goods, food and agricultural products, hazardous goods
- Shelf ready trays
- Displays / POS materials
- Game and puzzle boxes
- Shopping bags

For more information please visit www.sappi.com

This document is for information purposes only. The information given has been prepared to the best of our knowledge i.e., based on due diligence and the state of research at the time of its release date. It does not provide any warranty or guarantee for specific properties or for suitability for a specific purpose or application. The responsibility for testing the suitability of the product for specific applications lies entirely with the purchaser. We reserve our right to change this document at any time.